


RWS-374 Series

WENSHING®

V1.02

Wireless Hi Sensitivity Receiver Module (RF ASK)

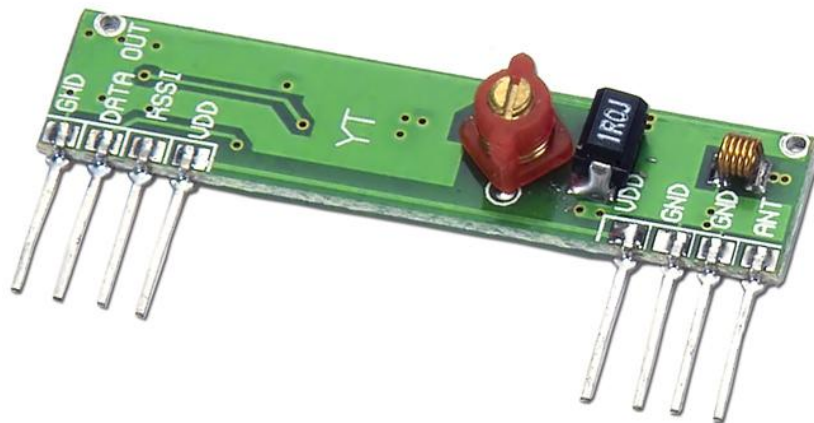

➤ **Model: RWS-374-1 (303.875MHz)**

- *Frequency Range: 303.875MHz
- *Modulate Mode: ASK
- *Circuit Shape: LC
- *Data Rate: 4800 bps
- *Selectivity: -108 dBm
- *Channel Spacing: $\pm 500\text{KHz}$
- *Supply Voltage: 5V
- * High sensitivity passive design.
- *Simple to apply with low external count.


➤ **Electrical Characteristics :**

Characteristics	Sym	Min	Typ	Max	Units
Operating Radio Frequency	FC	303.325	303.875	304.325	MHz
Sensitivity	Pref.	-106	-108	-110	dBm
Channel Width		-500		+ 500	KHz
Noise Equivalent BW	NEB		5	4	
Baseboard Data Rate				3	KB/S
Receiver Turn On Time				3	ms

➤ **DC Characteristics :**

Symbol	Parameter	Conditions	Min	Typ	Max	Units
Vcc	Operating Supply Voltage		4.9	5	5.1	
I Tot	Operating Supply Voltage			4.5		
V Data	Data Out	1 Data = -10 uA (Low)	Vcc	Vcc		V
		1 Data = -10 uA (Low)	-0.5		0.3	V

➤ **Size:**

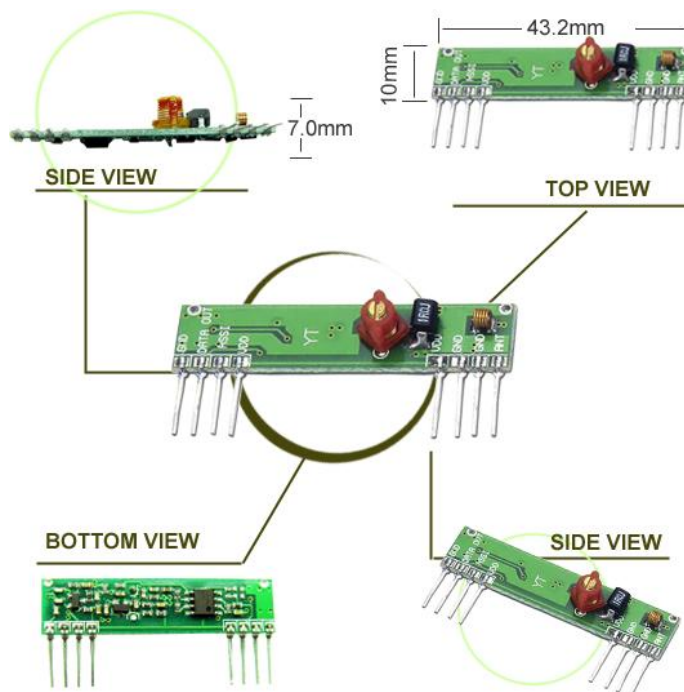

➤ Pin Assignment:



Pin	Function	Description
1	GND	
2	Digital Output	
3	Linear Out	
4	VCC	
5	VCC	
6	GND	
7	GND	
8	ANT	About 13cm

➤ **Demo Circuit:**

