




Single Button Trigger (SBT) with BUSY and /BUSY Output

FEATURES

- One key SBT sequential trigger
- Up to 128 voice groups
- Any combination of the trigger options:
 - Level/Edge; Hold/Un-hold; Retrigger/Non-retrigger
- DAC through VOUT2_COUT pin
- PWM through VOUT1 and VOUT2
- Two levels PWM output volume
- BUSY and /BUSY signal outputs supported
- Support 8-bit PCM, 5-bit uLaw and 4-bit ADPCM compression

PIN CONFIGURATIONS

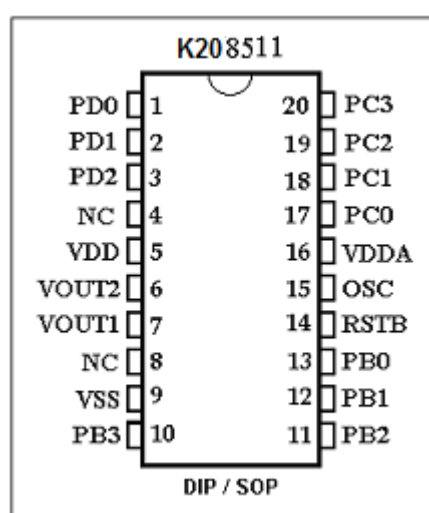

PIN DESCRIPTIONS

Pin Names	Description
VOUT1	PWM output to drive speaker directly
VOUT2_COUT	PWM output or COUT DAC output select by programmable option
VSS	Power Ground
OSC	Oscillator input
VDDA	Program power pin, connect to VDD during playback
VDD	Positive Power Supply
PB0	SBT Input trigger pins with 1M Ohm internal pull-down
PB1	BUSY output, active HIGH during voice playback
PB2	/BUSY output, active LOW during voice playback
PB3	Unused I/O pins, leave open
PCn, PDm	Unused I/O pins, leave open
RSTB	Reset pin, Low active

Note: where n is from 0 to 3, m is from 0 to 2.

Note: pins for memory programming are: VDD, VDDA, VSS, PB0, PB1, OSC, VOUT2 and RSTB.



Ramp-up-down enable or disable

When COUT is used for playback, Ramp-up-down would be enabled. This function eliminates the 'POP' noise at the beginning and end of voice playback.

When VOUT1 and VOUT2 are used to drive speaker directly, the Ramp-up-down operation are disabled.

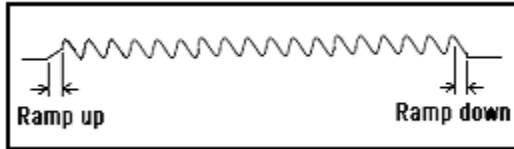


Fig. 1 Ramp-up-down Enable

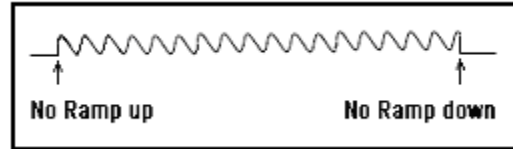


Fig. 2 Ramp-up-up Disable

Trigger Options

User selectable options that affect each individual group are called Group Options. They are:

- Edge or Level trigger
- Unholdable or Holdable trigger
- Re-triggerable or non-retriggerable

Fig. 3 to Fig. 4 show the voice playback with different combination of triggering mode and the relationship between outputs and voice playback.

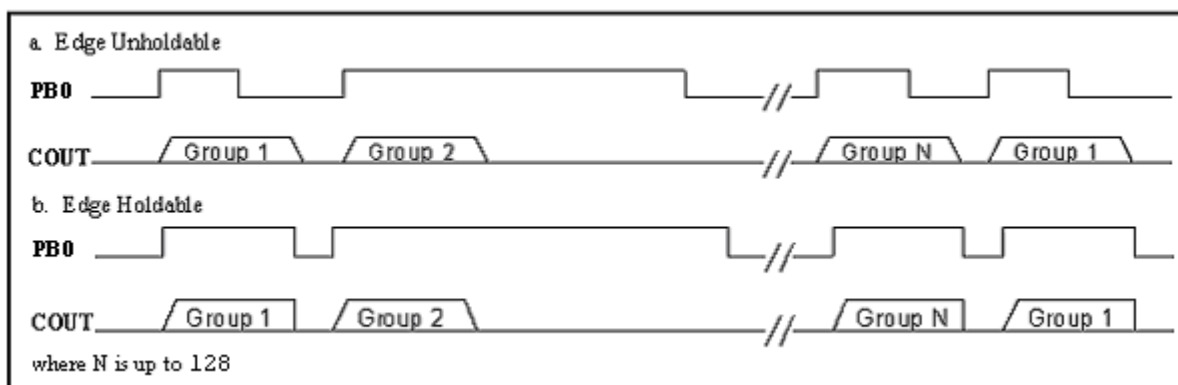


Fig. 3 SBT sequential trigger with Edge Holdable and Unholdable


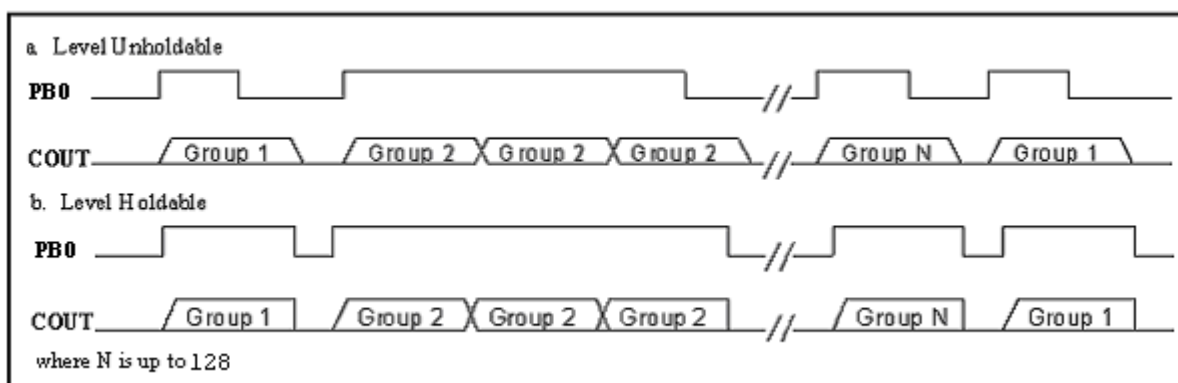


Fig. 4 SBT sequential trigger with Level Holdable and Unholdable



TRIGGER TIMING

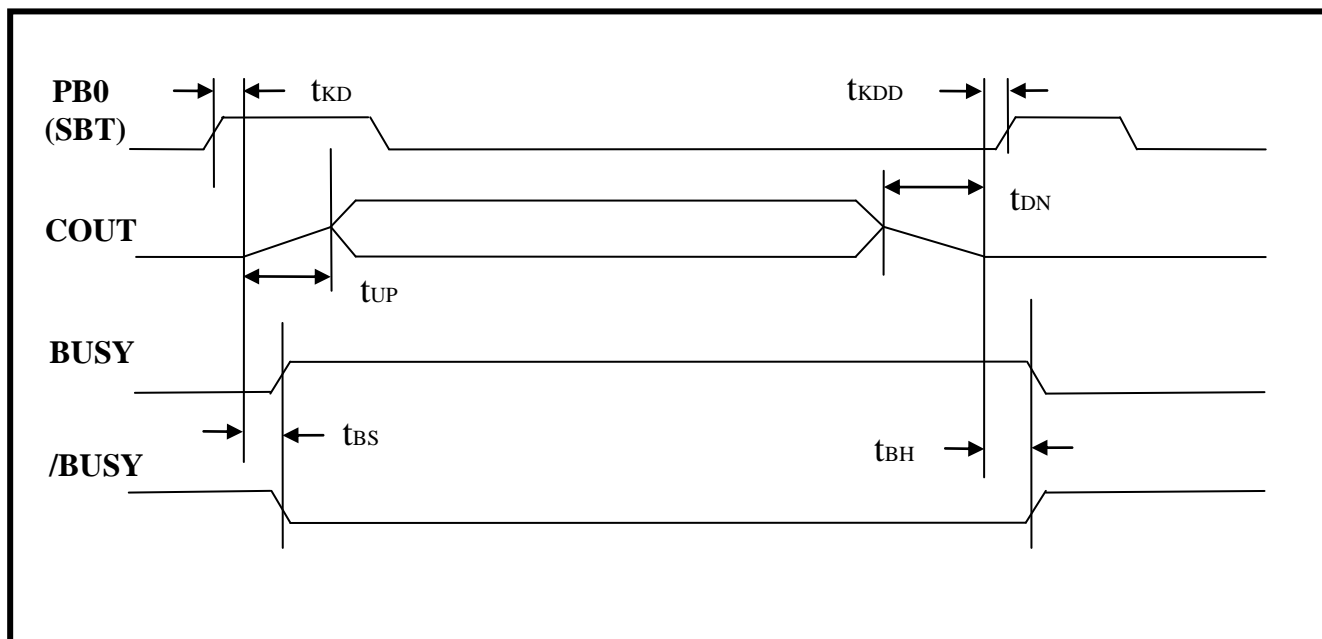

Symbol	Parameter	Min.	Typ.	Max.	Unit	Note
t_{KD}	Key trigger debounce time	$64/F_s$	—	—	sec	1
t_{KDD}	Key trigger delay after ramp down	--	0	--	ms	
t_{UP}	Ramp up time	0	$128/F_s$	--	sec	1
t_{DN}	Ramp down time	0	--	$256/F_s$	sec	2
t_{BS}	BUSY output set up time	0	--	$1/F_s$	sec	1
t_{BH}	BUSY output hold time	--	--	$1/F_s$	sec	1

Note:

- 1) Where F_s is sampling rate.
- 2) Ramp down is from the value of the last sound sample.

TYPICAL APPLICATIONS

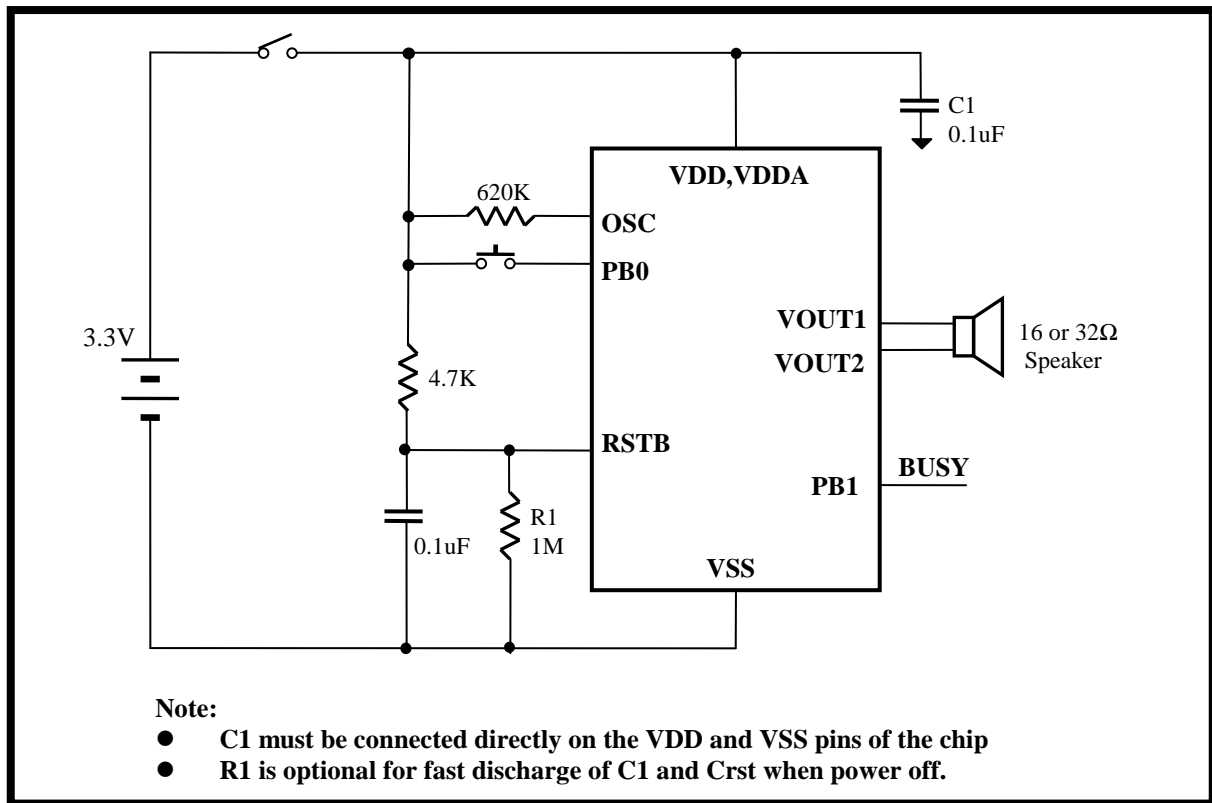


Fig 5a. 3.3V Battery with PWM direct drive for 16 or 32 Ohm Speaker

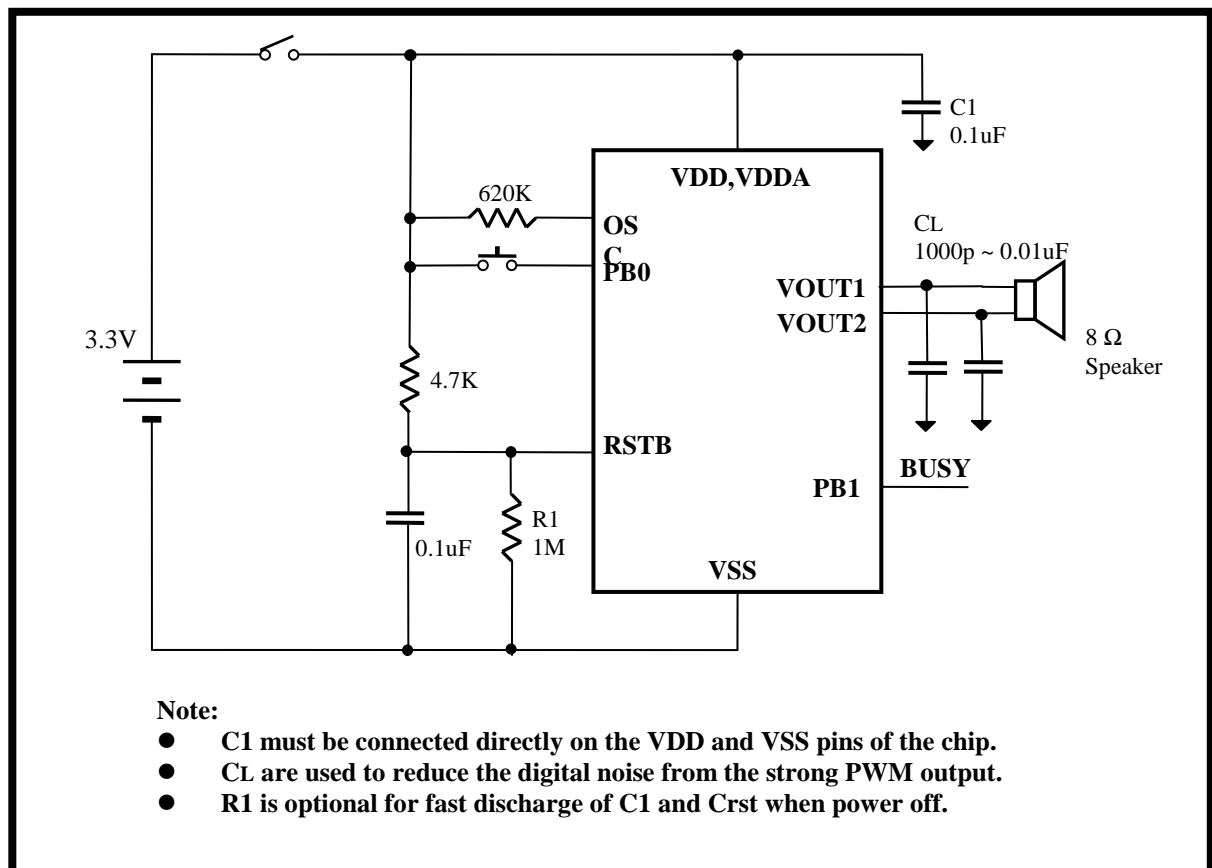


Fig 5b. 3.3V Battery with PWM direct drive for 8 Ohm Speaker


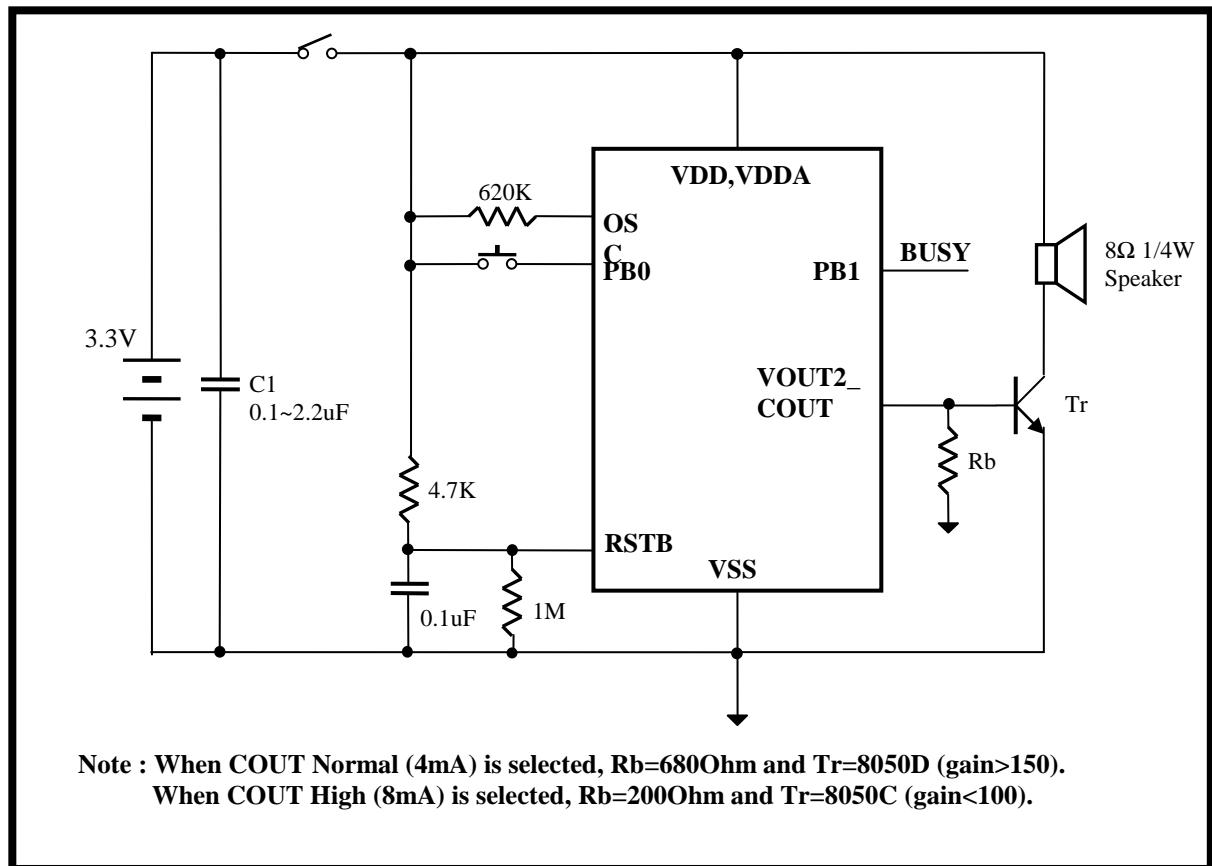


Fig 6. 3.3V Battery with Transistor direct drive

Bonding Diagrams

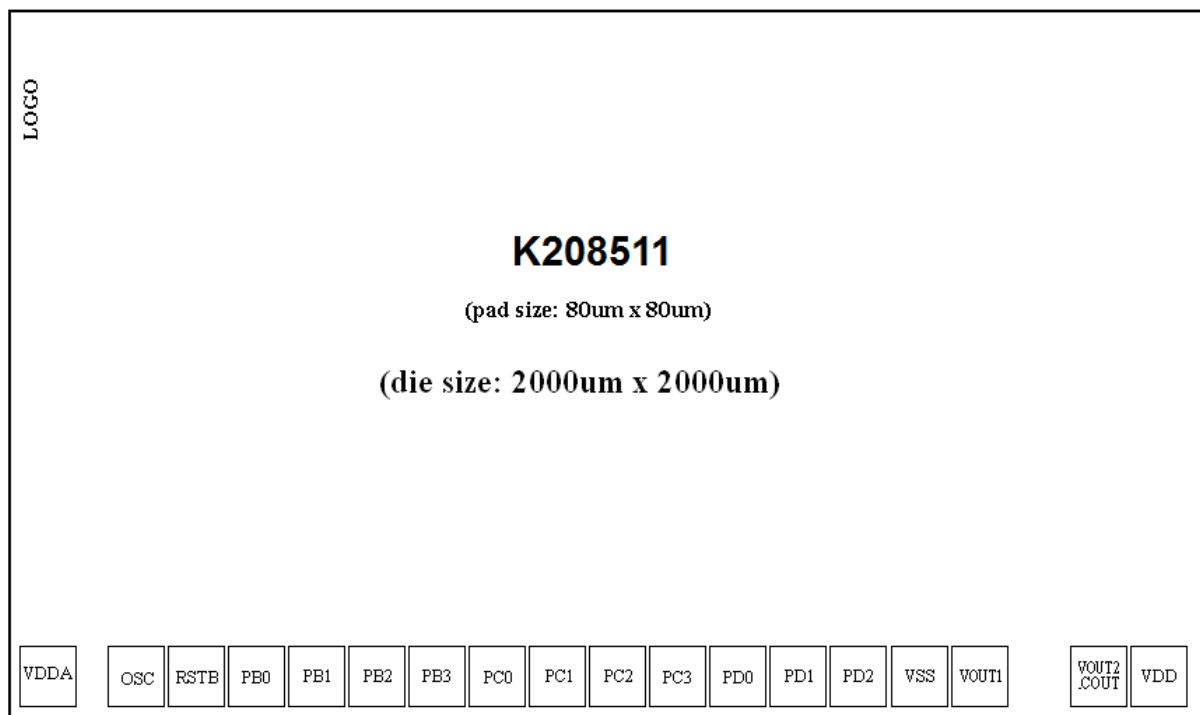

Note:

1. Substrate must be connected to VSS
2. Bonding pad size is 80 um x 80 um